



Features


12~40% lighter weight by carbon nano heat-radiation coating
LED with high efficiency & excellent thermal property
(LED Tj 150°C, Life cycle >60,000Hr)

Weight 265g
IP 66


Applications

Roadway, parks, pathways and car parks.

Dimensions

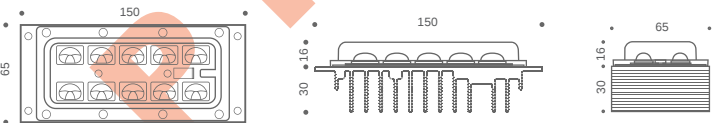

Light distribution

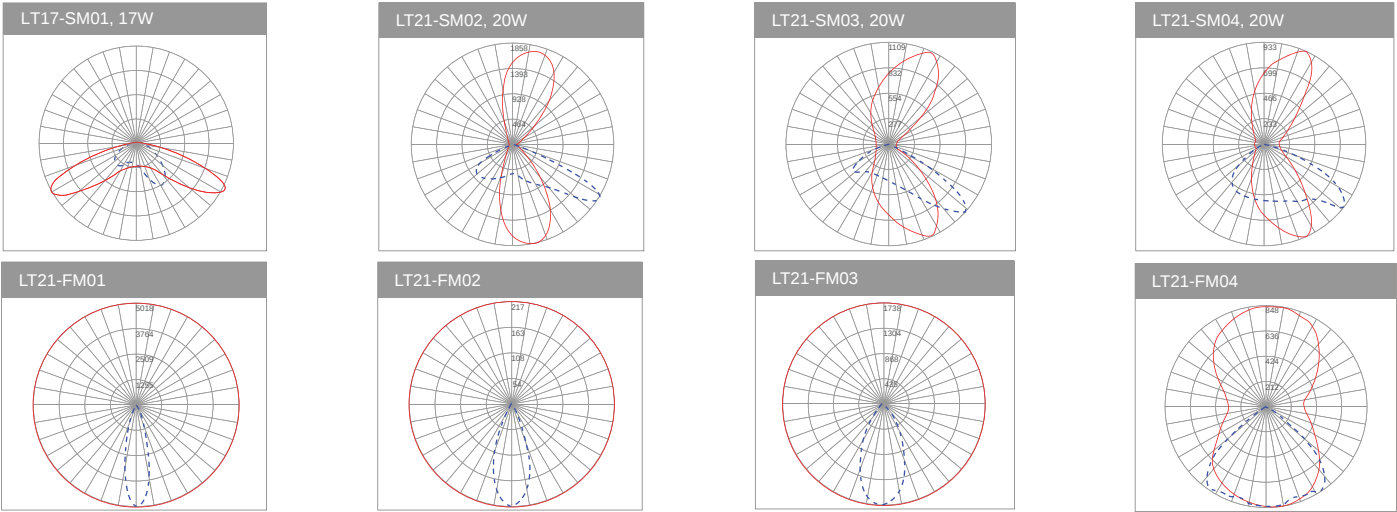

Ordering Information

	Consumed Wattage	Number of LEDs	Input Voltage	Drive Current	Luminous Flux	CCT* (± 250K)
LT17-SM01	17W	8	24V	700mA	1550 lm	4000K
LT21-SM02	20W	10	30V	700mA	2300 lm	4000K
LT21-SM03	20W	10	30V	700mA	1650 lm	4000K
LT21-SM04	20W	10	30V	700mA	1650 lm	4000K
LT21-FM01	20W	10	30V	700mA	1500 lm	4000K

*Cool white, natural white and warm white available