


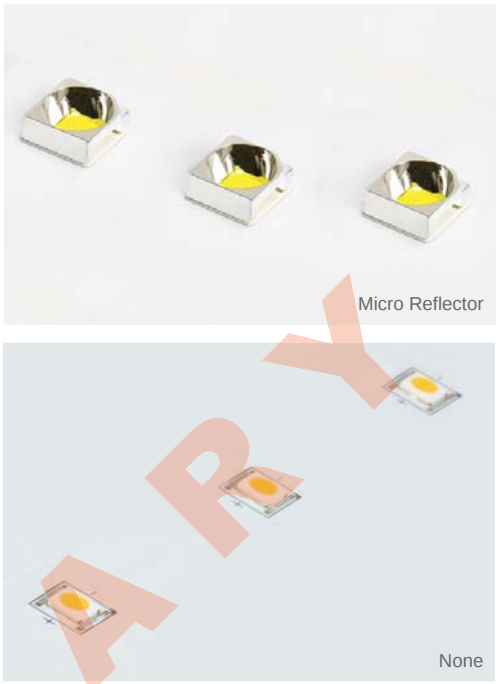

Features

- Driver on board LED light engine with optics
- Complying to zhaga standard
- Dimming available
- Driven directly off of AC line voltage
- U.S. and worldwide patents pending
- Miniaturized optical system
- CRI >80
- Five-year warranty available

Ordering information


	Consumed Wattage	Number of LEDs	Luminous Flux	Max Candela	Optic Type	CCT*
AC-DOB-Z-10R	10W	4	800	TBD	Micro Reflector	3000K
AC-DOB-Z-10N	10W	4	900	TBD	None	3000K
AC-DOB-Z-20R	20W	8	1600	TBD	Micro Reflector	3000K
AC-DOB-Z-20N	20W	8	1800	TBD	None	3000K

*Multiplier factor for 4000K : 1.07


Applications

Bulb, LED Module, Down Light, Sensor Light, Tube and Industrial Light.

Dimensions



D55
(55mm x 55mm)



D75
(diameter 75mm)

Light distribution

