



Features

- Driver on board LED light engine with optics
- Complying to zhaga standard
- Dimming available
- Driven directly off of AC line voltage
- U.S. and worldwide patents pending
- Miniaturized optical system
- CRI >80
- Five-year warranty available

Ordering information


	Consumed Wattage	Number of LEDs	Luminous Flux	Max Candela	Optic Type	CCT*
AC-DOB-L-L28R	15W	8	1240 lm	TBD	Micro Reflector	3000K
AC-DOB-L-L28L	15W	8	1240 lm	TBD	Mini Lens	3000K
AC-DOB-L-L28N	15W	8	1350 lm	TBD	None	3000K
AC-DOB-L-L56R	30W	16	2400 lm	TBD	Micro Reflector	3000K
AC-DOB-L-L56L	30W	16	2400 lm	TBD	Mini Lens	3000K
AC-DOB-L-L56N	30W	16	2700 lm	TBD	None	3000K

*Multiplier factor for 4000K : 1.07

Applications

Bulb, LED Module, Down Light, Sensor Light, Tube and Industrial Light.

Dimensions

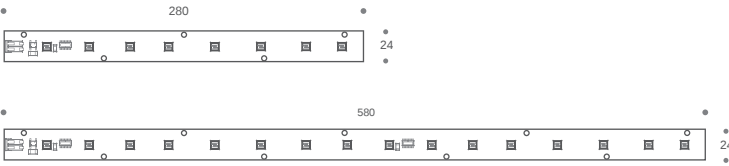

Light distribution

